


DIMMER COMPATIBILITY R50+R63+R80

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

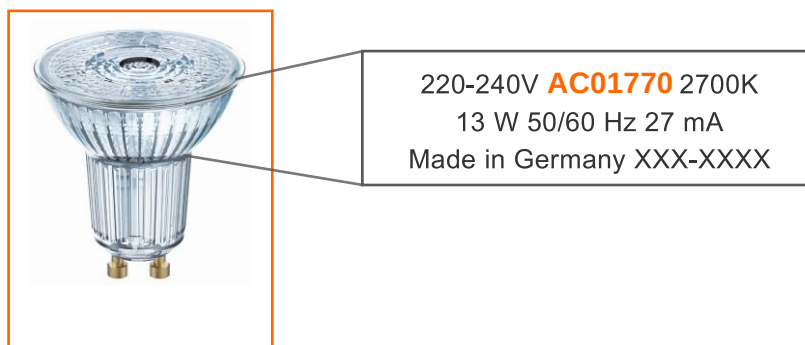

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend				
Very good dimmability with indicated number of lamps (dimming range greater than 75%)				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)				
Undesired dimmability				
Not relevant				
Not tested				

Dimmer				
Brand	Model	Voltage range	Power	Type
ABB	STD 50-3	230V50Hz	60-500	L
Altenburger Electronic	50.30	230V50Hz	15-350	T
ALPORA	DSP 400	230V50Hz	400	L
Berker	2861	230V50Hz	50-420	U
Bticino	LNN1441N	230V50Hz		
Bticino	LNN1440N	230V50Hz		
Bticino	NT4402N	230V50Hz	500	R
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T
Busch-Jaeger	6523 U-102	230V50Hz	420	T
Busch-Jaeger	2250 U	230V50Hz	60-600	L
Busch-Jaeger	6526 U	230V50Hz		
Busch-Jaeger	2247 U-500	230V50Hz		
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L
DINUY	RE EL1LE1	230V50Hz	400	LED
ELKO	400GLE	230V50Hz		
ELKO	315GLE	230V50Hz	20-315	T
ELKO	600GLE	230V50Hz	40-600	U
ELKO	420GLEI	230V50Hz	40-420	U

SUPERSTAR PAR16 35 36°		SUPERSTAR PAR16 50 36°		SUPERSTAR PAR16 80 36°		SUPERSTAR PAR16 80 120°	
							
EAN/Basic Code 405283330153/AC01184 405283330157/AC01192		EAN/Basic Code 405283330178/AC01187 405283330195/AC01194		EAN/Basic Code 405283330218/AB41905 405283330232/AB41906		EAN/Basic Code 405807503688/AC03049 405807503682/AC03051	
Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
2-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
1-10	98% - 15%	2-10	97% - 1%	1-4	96% - 1%	1-4	96% - 1%
1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%
1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%
2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%
3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%
2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%
1-10	96% - 22%	1-10	97% - 26%				
1-10	98% - 16%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%
1-13	98% - 34%	1-10	97% - 35%	1-5		1-5	
1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%
1-11	98% - 1%	1-10	99% - 1%	1-5	99% - 7%	1-5	99% - 7%
1-10		1-10		1-4	97% - 1%	1-4	97% - 1%
2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%
1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%
1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%

Information about the LEDVANCE lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER COMPATIBILITY R50+R63+R80

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
13 W 50/60 Hz 27 mA
Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.

Liste der getesteten Dimmer

Legend								
Very good dimmability with indicated number of lamps (dimming range greater than 75%)								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)								
Undesired dimmability								
Not relevant								
Not tested								
Dimmer								
Brand	Model	Voltage range	Power	Type				
ABB	STD 50-3	230V50Hz	60-500	L				
Altenburger Electronic	50-30	230V50Hz	15-350	T				
AURORA	DSP 400	230V50Hz	400	L				
Berker	2861	230V50Hz	50-420	U				
Bticino	UNINT4411N	230V50Hz						
Bticino	UNINT4408	230V50Hz						
Bticino	NT4402N	230V50Hz	500	R				
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T				
Busch-Jaeger	6523 U-102	230V50Hz	420	T				
Busch-Jaeger	2250 U	230V50Hz	60-600	L				
Busch-Jaeger	6526 U	230V50Hz						
Busch-Jaeger	2247 U-500	230V50Hz						
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L				
DINJY	RE EL1LE1	230V50Hz	400	LED				
ELKO	400GLI	230V50Hz						
ELKO	316GLE	230V50Hz	20-315	T				
ELKO	600GLI	230V50Hz	40-600	U				
ELKO	420GLEI	230V50Hz	40-420	U				

Angaben zum LEDVANCE Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

DIMMER COMPATIBILITY R50+R63+R80

Legend					R50 60 36° DIM P		R50 60 36° DIM S		R63 60 36° DIM P		R63 60 36° DIM S		R80 60 36° DIM P		R80 60 36° DIM S		R80 100 36° DIM P	
Good dimmability with indicated number of lamps (dimming range greater than 75%)																		
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																		
Undesired dimmability																		
Not tested																		
					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code	
					4099854058608 / AC57976		4099854059179 / AC45722 4099854059236 / AC45723		4099854047954 / AC45655		4099854048456 / AC45641		409985405234 / AC45656		4099854048438 / AC45642		409985405258 / AC45657	
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type														
ABB	STD 50-3	230/50Hz	60-500	L	100-19%		100-8%	100-22%	100-4%	100-7%	100-4%	100-7%	100-4%	100-7%	100-4%	100-7%	98-2%	98-3%
Altenburger	50,3	230/50Hz				89-28%	81-0%	100-0%		100-0%		100-0%		100-0%		100-0%		
AURORA	DSP 400	230/50Hz	400	L	100-0%	100-0%	100-0%		98-0%	100-0%	98-0%	100-0%	98-0%	100-0%	98-0%	100-0%		90-0%
Berker	2861	230/50Hz	50-420	U		100-11%											100-0%	100-0%
Bticino	LN/NT4111 N HC/HD/HS44 11	230/50Hz			100-0%	100-9%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	82-0%	86-0%
bticino	NT4402N	230/50Hz	500	R			100-0%	100-0%										
Busch-Jaeger	6513 U-102	230/50Hz	420	T	100-47%	100-47%	77-14%		100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	100-0%	90-0%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	100-0%	90-0%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	98-0%	100-0%	84-0%	100-0%		100-0%		100-0%		100-0%		100-0%		98-0%
Busch-Jaeger	6526 U	230/50Hz																
NTURY CONTMULTI DIMMER	230/50Hz	60-600	U		89-0%	90-29%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
DimMax	420SL	230/50Hz	200	L/T	93-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED	100-0%	100-0%	100-37%	100-37%	100-2%	100-1%	100-2%	100-1%	100-2%	100-1%	100-2%	100-1%	100-1%	100-0%
Dormintell	DimMax 420 SI	230/50Hz	200	L/T	93-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
ELKO	400GLI	230/50Hz			91-9%	84-9%	100-15%	100-15%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	90-0%	94-0%
ELKO	315GLE	230/50Hz	20-315	T	84-0%	92-0%	81-0%	100-0%	92-0%	100-0%	92-0%	100-0%	92-0%	100-0%	92-0%	100-0%		
ELKO	600GLI	230/50Hz	40-600	U	100-11%	100-0%	100-0%	100-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	90-0%	88-0%
ELKO	420GLEA	230/50Hz	40-420	U	84-0%	89-0%	100-0%		89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	82-0%	100-0%
ELKO	1000LRI	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
ELKO	630GLE	230/50Hz	20-630	U	84-17%	100-13%	100-39%	100-0%		61-1%		61-1%					100-0%	100-0%
Eltako	UD61NPN-UC	230/50Hz	5-400	R/L/C	93-9%	100-19%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-16%
Feller	40200.LEDxxx	230/50Hz			89-17%	93-11%	86-0%	100-0%									100-0%	100-0%
Feller	40600.RC	230/50Hz			84-17%	100-13%	100-39%	100-0%		61-1%		61-1%					100-0%	100-0%
Feller	40600.RL	230/50Hz			100-11%	100-0%	100-0%	100-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	90-0%	88-0%
Feller	40420.RLC	230/50Hz			84-0%	89-0%	100-0%		89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	82-0%	100-0%
Feller	31000	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Feller	226200	230/50Hz			90-0%	93-0%	100-0%	100-0%	94-0%	100-0%	94-0%	100-0%	94-0%	100-0%	94-0%	100-0%	90-0%	94-0%
Gira	030700	230/50Hz	20-525	T	92-11%	93-11%	100-11%	100-0%	92-1%	100-0%	92-1%	100-0%	92-1%	100-0%	92-1%	100-0%	100-0%	98-0%
Gira	117600	230/50Hz	50-420	U	93-9%	100-19%	89-0%	100-0%	98-98%	98-98%	98-98%	98-98%					100-2%	100-2%
Gira	217400	230/50Hz	4X20-250	KNX-U	100-19%	100-19%	100-18%	100-0%	100-26%	100-0%	100-26%	100-0%	100-26%	100-0%	100-26%	100-0%	100-23%	100-0%
Hager	WUD87	230/50Hz	400	LED-U	100-19%	89-17%	100-0%	100-0%	90-0%	92-0%	90-0%	92-0%	90-0%	92-0%	90-0%	92-0%	86-0%	86-0%
Hamilton	KP1X40	230/50Hz	400		100-9%	100-0%												
Hugo Müller	adin 872110 I	230/50Hz			100-0%	100-0%	100-37%	100-37%	100-2%	100-1%	100-2%	100-1%	100-2%	100-1%	100-2%	100-1%	100-1%	100-0%
Jung	225 NVDE	230/50Hz	20-500	L	90-0%	93-0%	100-0%	100-0%	94-0%	100-0%	94-0%	100-0%	94-0%	100-0%	94-0%	100-0%	90-0%	94-0%
Jung	225 TDE	230/50Hz			92-11%	93-11%	100-11%	100-0%	92-1%	100-0%	92-1%	100-0%	92-1%	100-0%	92-1%	100-0%	100-0%	98-0%

DIMMER COMPATIBILITY R50+R63+R80

Legend					R50 60 36° DIM P	R50 60 36° DIM S		R63 60 36° DIM P		R63 60 36° DIM S		R80 60 36° DIM P		R80 60 36° DIM S		R80 100 36° DIM P		
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																	
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																	
	Undesired dimmability																	
	Not tested																	
					EAN / Basic Code	EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		
					4099854058608 / AC57976	4099854059179 / AC45722 4099854059235 / AC45723		4099854047954 / AC45655		4099854048456 / AC45641		4099854053234 / AC45656		4099854048438 / AC45642		4099854053258 / AC45657		
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type														
Jung	254 UDIE1	230/50Hz			93-9%	100-19%	89-0%	100-0%	98-98%	98-98%	98-98%	98-98%					100-2%	100-2%
Jung	1224 LEDUDE	230/50Hz		LED					59-0%	65-0%	59-0%	65-0%	59-0%	65-0%	59-0%	65-0%		
Jung	3904 REGHE	230/50Hz			100-19%	100-19%	100-18%	100-0%	100-26%	100-0%	100-26%	100-0%	100-26%	100-0%	100-26%	100-0%	100-23%	100-0%
Legrand	665114	230/50Hz	400	U	100-0%	100-9%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	82-0%	86-0%
Legrand	74319/57433	230/50Hz	400	U	100-0%	100-9%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	82-0%	86-0%
Legrand	72239/57273	230/50Hz	400	U	100-0%	100-9%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	82-0%	86-0%
Legrand	78407/07920	230/50Hz	400	U	100-0%	100-9%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	82-0%	86-0%
Legrand	48869/04887	230/50Hz	400	U	100-0%	100-9%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	82-0%	86-0%
Legrand	67083/04886	230/50Hz	400	U	100-0%	100-9%	100-0%	100-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	82-0%	86-0%
Legrand	099314	230/50Hz	300	RL														98-0%
Legrand	770062	230/50Hz	400	RLC	100-9%	100-14%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	98-0%	98-0%
MASTER	DM-DGL	230/50Hz	1000	U / LED					100-42%	100-46%	100-42%	100-46%	100-42%	100-46%	100-42%	100-46%	100-42%	100-47%
MASTER	DM-2500	230/50Hz	2500	U / LED	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Merten	1EG5136-000	230/50Hz			84-0%	92-0%	81-0%	100-0%	92-0%	100-0%	92-0%	100-0%	92-0%	100-0%	92-0%	100-0%		
Merten	1EG5134-000	230/50Hz			89-17%	93-11%	86-0%	100-0%									100-0%	100-0%
Merten	1EG5137-000	230/50Hz			84-17%	100-13%	100-39%	100-0%		61-1%		61-1%					100-0%	100-0%
Merten	1EG5133-000	230/50Hz			100-11%	100-0%	100-0%	100-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	90-0%	88-0%
Merten	1EG5138-000	230/50Hz			84-0%	89-0%	100-0%		89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	82-0%	100-0%
Merten	1EG 5170-030	230/50Hz	10-200	U			100-11%	100-13%		100-0%		100-0%		100-0%		100-0%		59-0%
Merten	MEG 5131	230/50Hz	40-400	L	89-0%	89-0%	100-0%	100-0%	95-0%	93-0%	95-0%	93-0%	95-0%	93-0%	95-0%	93-0%	90-0%	90-0%
Merten	MEG 5132	230/50Hz			89-0%	89-0%	100-0%	100-0%	95-0%	93-0%	95-0%	93-0%	95-0%	93-0%	95-0%	93-0%	90-0%	90-0%
Merten	MEG 5140	230/50Hz	9-100	L	84-0%	89-0%	100-0%	100-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	90-0%	94-0%
Merten	MEG 5135	230/50Hz	60-1000	L	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
MK	K4501	230/50Hz	180	L		91-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	99-0%	100-0%
NEXUS	881P-01	230/50Hz	400	L					100-0%	97-0%	100-0%	97-0%	100-0%	97-0%	100-0%	97-0%	94-0%	95-0%
NIKO	310-01900 01901	230/50Hz	5-200	U	100-0%	100-0%	100-0%	100-0%	100-0%		100-0%		100-0%		100-0%		100-0%	100-0%
NIKO	330-00700 00701	230/50Hz	5-200	U	100-0%		100-0%	100-19%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Odace	S520512	230/50Hz			89-17%	93-11%	86-0%	100-0%									100-0%	100-0%
Odace	S520511	230/50Hz			100-11%	100-0%	100-0%	100-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	90-0%	88-0%
Odace	S520515	230/50Hz			84-0%	89-0%	100-0%		89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	82-0%	100-0%
Odace	S520518	230/50Hz			84-0%	89-0%	100-0%	100-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	90-0%	94-0%
Osram	TiDALI 315 DII	230/50Hz	20-315	DALI-T	100-13%	100-13%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
PEHA	435 HAN	230/50Hz	60-600	L	89-0%	84-0%	91-0%	100-25%	92-0%	93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	93-0%	90-0%	94-0%
Schneider	400GLI	230/50Hz	40-400	T	91-9%	84-9%	100-15%	100-15%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	90-0%	94-0%
Schneider	SBD315RC	230/50Hz			84-0%	92-0%	81-0%	100-0%	92-0%	100-0%	92-0%	100-0%	92-0%	100-0%	92-0%	100-0%		

DIMMER COMPATIBILITY R50+R63+R80

Legend					R50 60 36° DIM P	R50 60 36° DIM S		R63 60 36° DIM P		R63 60 36° DIM S		R80 60 36° DIM P		R80 60 36° DIM S		R80 100 36° DIM P						
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																					
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																					
	Undesired dimmability																					
	Not tested																					
	EAN / Basic Code				EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code							
	4099854058608 / AC57976				4099854059179 / AC45722 4099854059236 / AC45723		4099854047954 / AC45655		4099854048456 / AC45641		4099854053234 / AC45656		4099854048438 / AC45642		4099854053258 / AC45657							
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Brand	Model	Voltage range	Power	Type																		
Schneider	SBD200LED	230/50Hz	400		89-17%	93-11%	86-0%	100-0%									100-0%	100-0%				
Schneider	SBD630RC	230/50Hz			84-17%	100-13%	100-39%	100-0%		61-1%		61-1%					100-0%	100-0%				
Schneider	SBD600RL	230/50Hz			100-11%	100-0%	100-0%	100-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	90-0%	88-0%				
Schneider	SBD420RCRL	230/50Hz			84-0%	89-0%	100-0%		89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	89-0%	92-0%	82-0%	100-0%				
Schneider	5170	230/50Hz					100-11%	100-13%		100-0%		100-0%		100-0%		100-0%		59-0%				
Schneider	SBD400RL	230/50Hz			89-0%	89-0%	100-0%	100-0%	95-0%	93-0%	95-0%	93-0%	95-0%	93-0%	95-0%	93-0%	90-0%	90-0%				
Schneider	SBDSP1	230/50Hz			84-0%	89-0%	100-0%	100-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	95-0%	90-0%	94-0%				
Schneider	ATTD1000RL	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%				
Shuttle	HM-T-LED-500	230/50Hz	2-500	T & LED-T	100-0%	100-5%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-23%	100-0%				
Siemens	5TC8 284	230/50Hz	20-525	T	100-20%	100-20%	100-15%	100-0%		98-0%		98-0%		98-0%		98-0%	100-1%	100-0%				
Siemens	VG1-527-1AB	230/50Hz	20-500	KNX-U	100-19%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%				
theben	MAX 544 plus	230/50Hz	250	T	100-0%	100-9%			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%				
theben	IMAX 534 plus	230/50Hz	400	T	100-28%	100-37%			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-4%	100-4%				
VADSBO	LD 220	230/50Hz	1-200	U					98-20%	100-20%	98-20%	100-20%	98-20%	100-20%	98-20%	100-20%	100-20%	100-16%				
VARILIGHT	HQ3W	230/50Hz	400		100-19%	100-5%	100-0%	100-0%	85-0%	85-0%	85-0%	85-0%	85-0%	85-0%	85-0%	85-0%	82-0%	100-0%				
VARILIGHT	JQP401W	230/50Hz	400	T	100-0%	100-0%			100-15%	100-16%	100-15%	100-16%	100-15%	100-16%	100-15%	100-16%	100-16%	100-0%				
Vimar	20135	230/50Hz	3 - 100	U	100-19%	100-19%			100-5%	100-5%	100-5%	100-5%	100-5%	100-5%	100-5%	100-5%	100-3%	100-2%				
ZANO	WH401	230/50Hz	400	L	100-0%				94-0%	97-0%	94-0%	97-0%	94-0%	97-0%	94-0%	97-0%	94-0%	98-0%				
ZANO	WH251	230/50Hz	250		100-0%	100-0%			95-0%	96-0%	95-0%	96-0%	95-0%	96-0%	95-0%	96-0%		94-0%				
ZANO	Z GRID 700	230/50Hz	250	LED																		
ZANO	Z GRID 500	230/50Hz	500		91-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	94-0%	100-0%				

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 1-5
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com